


Capacitive Touch Glass (PCAP)



- High accuracy and durability
- High surface hardness
- Multi-touch
- Gloved hand touch available
- Air / Optical Bonding (Optional)
- Customization Design Services

Resistive Touch Glass (RTP)

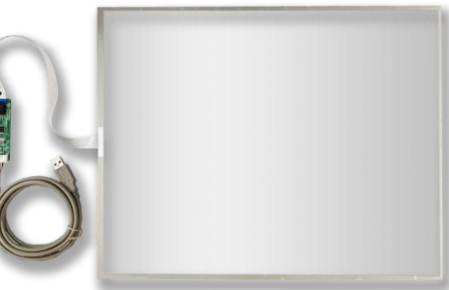

- Gloved hand touch available
- Remains functional even if the surface is broken
- Air / Optical Bonding (Optional)
- Customization Design Services

PCAP Touch (Glass)

Size	Part No	Structure	Touch IC	Transparency	Surface Hardness	FPC Type	Interface	V/A Outline Dimension (mm)	Outline Dimension (mm)
7"	B070PFU-E04	G/G	EETI	85%	6H	COF	USB / I2C	155.24 x 87.12	164.9 x 100
10.1"	B101PFU-E03	G/G	EETI	85%	6H	COF	USB / I2C	217.56 x 136.2	247.76 x 166.4
11.6"	B101PFU-E03	G/G	EETI	85%	6H	COF	USB / I2C	257.32 x 145.18	287.32 x 191.18
12.1"	B121PBU-E03	G/G	EETI	85%	6H	COB	USB / I2C	246.76 x 185.32	260.5 x 204
12.5"	B125PFU-E02	G/G	EETI	85%	6H	COF	USB / I2C	277.48 x 156.52	318.48 x 204.52
13.3"	B133PFU-E02	G/G	EETI	85%	6H	COF	USB / I2C	294.76 x 166.24	330.76 x 214.24
14"	B140PFU-E02	G/G	EETI	85%	6H	COF	USB / I2C	310.31 x 174.99	346.31 x 222.99
15"	B150PBU-E03	G/G	EETI	85%	6H	COB	USB / I2C	305.13 x 229.1	326.5 x 253.5
15.6"	B156PFU-E03	G/G	EETI	85%	6H	COF	USB / I2C	345.24 x 194.68	395.24 x 244.68
17.3"	B173PFU-E02	G/G	EETI	85%	6H	COF	USB / I2C	382.89 x 215.8	432.89 x 265.8
18.5"	B185PBU-E01	G/G	EETI	85%	7H	COB	USB / RS232	410.8 x 231.4	446.05 x 271.18
21.5"	B215PBU-E05	G/G	EETI	85%	6H	COB	USB / RS232	477.7 x 269.4	517 x 315
23.8"	B238PBU-E01	G/G	EETI	85%	6H	COB	USB / RS232	528.6 x 298	570 x 343
27"	B270PBU-E03	G/G	EETI	85%	6H	COB	USB / RS232	599 x 337.7	629 x 372
32"	B320PBU-E01	G/G	EETI	83%	6H	COB	USB	699.4 x 393.85	744.5 x 438.5

RTP Touch (Glass)

Size	Part No	Structure	Touch IC	Transparency	Surface Hardness	FPC Type	Interface	A/A Outline Dimension (mm)	Outline Dimension (mm)
5.7"	B057R5U-E01	F/G	EETI	80%	3H	COB	USB	115.2 x 86.4	126.2 x 99.4
7"	B070R5U-E02	F/G	EETI	80%	3H	COB	USB	154.1 x 86.6	164.5 x 99.5
8.4"	B084R5U-E01	F/G	EETI	79%	3H	COB	USB	171.4 x 128.8	186.9 x 142.3
10.1"	B101R5U-E01	F/G	EETI	80%	3H	COB	USB	217.56 x 136.2	229.46 x 149.1
10.4"	B104R5U-E03	F/G	EETI	80%	3H	COB	USB	212.2 x 159.4	225.8 x 174.3
12.1"	B121R5U-E01	F/G	EETI	80%	3H	COB	USB	246.8 x 185.5	261.8 x 199.8
15"	B150R5U-E02	F/G	EETI	80%	3H	COB	USB	303.5 x 227.5	322 x 245.5
15.6"	B156R5U-E01	F/G	EETI	80%	3H	COB	USB	344.23 x 193.54	359.3 x 209.5
17"	B170R5U-E01	F/G	EETI	80%	3H	COB	USB	337 x 269.5	356 x 286.5
19"	B190R5U-E01	F/G	EETI	80%	3H	COB	USB	377.3 x 302.05	393.4 x 316.65

PCAP Touch Display



- Multi-touch
- Gloved hand touch available
- Air Bonding
- Transparency 85%
- $\geq 6H$ Surface Hardness
- Customization Design Services
- Optional AD Board (HDMI.VGA.DVI.DP)

PCAP Touch (Glass)										
Size	Part No	Resolution	Brightness (cd/m ²)	Structure	Touch IC	FPC Type	Wide View Angle	Viewing Angle	Panel Interface	Touch Interface
7"	F070PET-Z03	1024 x 600	425	G/G	EETI	COF		75/75/70/75	LVDS	USB / I2C
10.1"	F101PET-T31	1280 x 800	297	G/G	EETI	COF	V	85/85/85/85	LVDS	USB / I2C
11.6"	F116PET-T21	1366 x 768	210	G/G	EETI	COF	V	89/89/89/89	eDP	USB / I2C
12.5"	F125PET-T31	1920 x 1080	255	G/G	EETI	COF	V	85/85/85/85	eDP	USB / I2C
13.3"	F133PET-T31	1920 x 1080	255	G/G	EETI	COF	V	85/85/85/85	eDP	USB / I2C
14"	F140PET-T31	1920 x 1080	255	G/G	EETI	COF	V	85/85/85/85	eDP	USB / I2C
15"	F150PET-T33	1024 x 768	255	G/G	EETI	COB	V	88/88/88/88	LVDS	USB / I2C
15.6"	F156PET-T21	1920 x 1080	210	G/G	EETI	COF	V	85/85/85/85	eDP	USB / I2C
17.3"	F173PET-T31	1920 x 1080	255	G/G	EETI	COF	V	85/85/85/85	eDP	USB / I2C
18.5"	F185PET-T21	1366 x 768	210	G/G	EETI	COB		85/85/80/80	LVDS	USB / RS232
21.5"	F215PET-T21	1920 x 1080	210	G/G	EETI	COB	V	89/89/89/89	LVDS	USB / RS232
23.8"	F238PET-T21	1920 x 1080	210	G/G	EETI	COB	V	89/89/89/89	LVDS	USB / RS232
27"	F270PET-T31	1920 x 1080	255	G/G	EETI	COB	V	89/89/89/89	LVDS	USB / RS232

RTP Touch Display



- Gloved hand touch available
- Air Bonding
- Transparency 79~80%
- 3H Surface Hardness
- Customization Design Services
- Optional AD Board (HDMI.VGA.DVI.DP)

PCAP Touch (Glass)										
Size	Part No	Resolution	Brightness (cd/m ²)	Structure	Touch IC	FPC Type	Wide View Angle	Viewing Angle	Panel Interface	Touch Interface
5.7"	F057RET-Z01	640 x 480	440	F/G	EETI	COB		80/80/70/70	TTL	USB
7"	F070RET-Z01	1024 x 600	400	F/G	EETI	COB		75/75/70/75	LVDS	USB
8.4"	F084RET-T41	800 x 600	360	F/G	EETI	COB		80/80/80/60	LVDS	USB
10.1"	F101RET-Z01	1280 x 800	280	F/G	EETI	COB	V	85/85/85/85	LVDS	USB
10.4"	F104RET-T51	1024 x 768	400	F/G	EETI	COB	V	88/88/88/88	LVDS	USB
12.1"	F121RET-T51	1024 x 768	400	F/G	EETI	COB	V	89/89/89/89	LVDS	USB
15"	F150RET-T31	1024 x 768	240	F/G	EETI	COB	V	88/88/88/88	LVDS	USB
15.6"	F156RET-T51	1920 x 1080	400	F/G	EETI	COB	V	89/89/89/89	eDP	USB
17"	F170RET-T21	1280 x 1024	200	F/G	EETI	COB		85/85/80/80	LVDS	USB
19"	F190RET-T21	1280 x 1024	200	F/G	EETI	COB		85/85/80/80	LVDS	USB